


NS No.	A	L1	L2	L5	L7	L8	L9	L10	H1	H2	H3	H4	H. CAPA. WEIGHT 保油量 重量 (L.) (K)
FA-25	25A	180	210	85	110	266	163	400	185	150	115	170	10
FA-40	40A	220	225	100	125	283	193	420	205	175	115	170	18
FA-65	65A	250	250	125	150	319	218	440	206	215	140	170	31
FA-80	80A	310	300	175	200	382	268	490	220	240	150	175	56

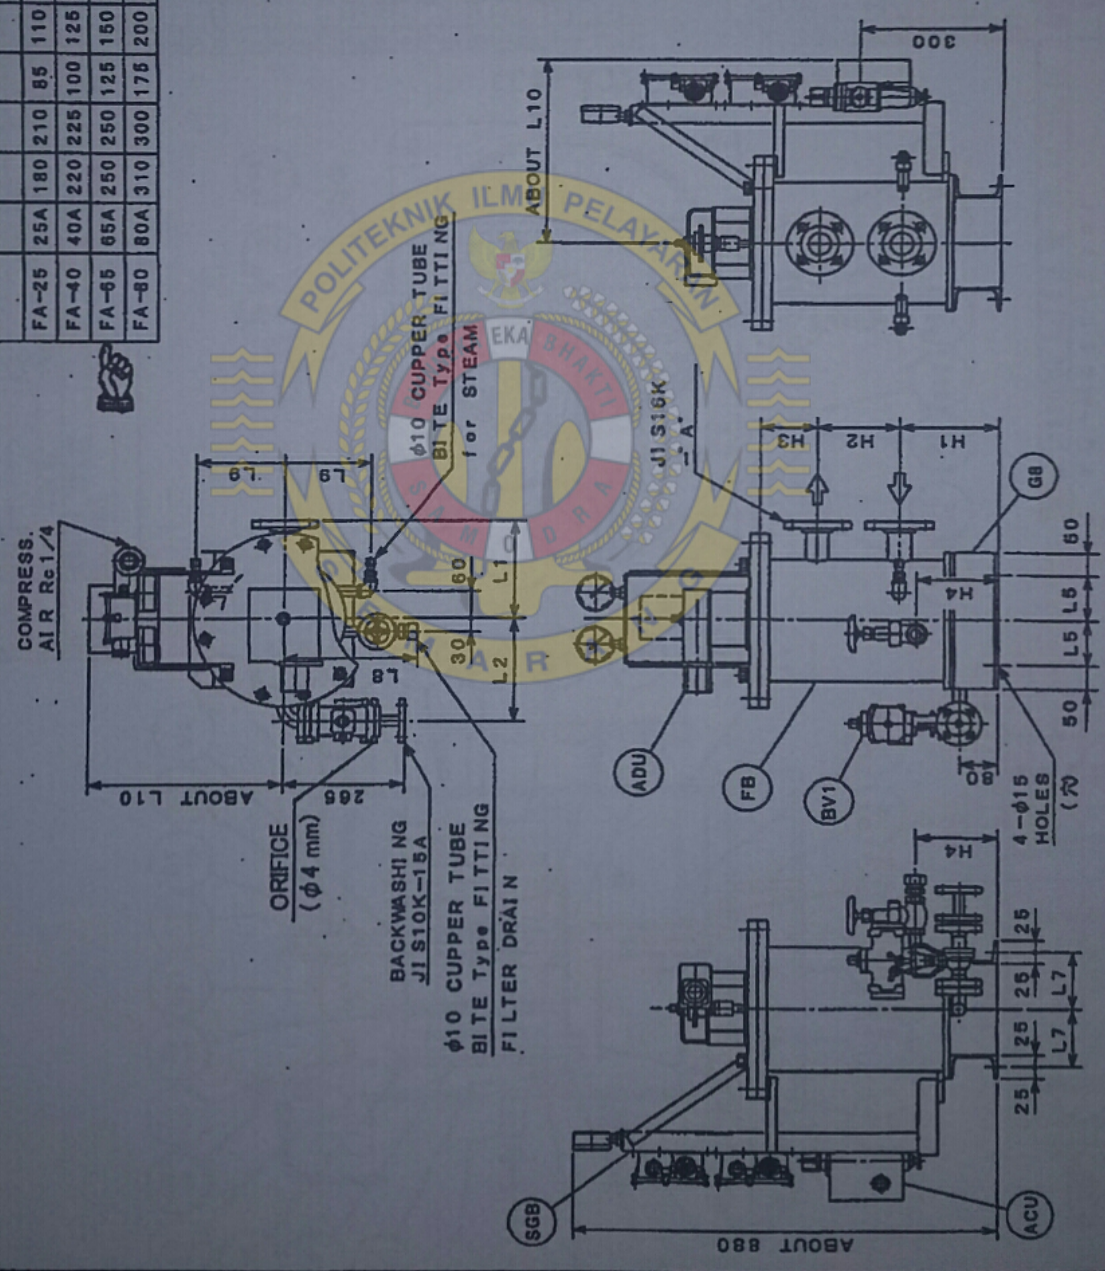

MARK	NAME OF PARTS	Q'TY
GB	BASE 架台	1
SGB	GAUGE BOARD ゲージボード	1
BV1	AUTO. BACKWASH. V. 自動型逆洗弁	1
ACU	AIR CONTROL UNIT 空気制御器	1
ADU	AUTO. DRIVE UNIT 自動型駆動機	1
FB	FILTER BODY コシ器本体	1

DESIGN PRESS. (設計圧力) : 1.6MPa  
 DESIGN TEMP. (設計温度) : 150°C  
 AIR PRESS. (空気圧力) : 0.4~0.8MPa  
 AIR CONSUMPTION (空気消費量) : 15NL/min. at 0.4MPa  
 BACKWASH. CAPA. (逆洗量) : L/min.  
 CONN. FLANGE (接続規格) : JIS16K-RF  
 TEST PRESS. (試験圧力) : 3.2MPa  
 NC No. 175F01NS No. FA-25~80

AUTOMATIC BACKWASHING TYPE  
 FUEL OIL FILTER  
 FO-Max filter FA-25~80  
 GENERAL ASSEMBLY DRAWING  
 自動洗浄式燃料油コシ器 全体組立図

NIIKURA KOGYO Co., LTD.  
 APP'D: *Y. Sakurai* DRAWN: Y. Sakurai  
 SCALE: DATE: 2004-11-08  
 DRAWN No. FA-25-80-CGD-3-A401